

Technical Bulletin

Bulletin Number: 449 Revision Number: R-00

Release Date: October 13, 1992 Revision Date: _____

SUBJECT: CORRECT CHANGE LAMP OPENING FILLER PLATE

MODELS AFFECTED: All Venders with the correct change lamp in the coin insert.

REASON: To provide a filler plate to cover the opening in the coin insert in which the correct change lamp is mounted.

ORDER:

Correct Change Opening Filler Plate Kit 491,011,000.24

Kit Contents:

1	491,010,220.03	Filler plate
1	491,010,230.13	Back-up plate
4	900,800,500.01	Keps nut, #8-32

FOR INSTALLATION INSTRUCTIONS SEE PAGE 2.

INSTALLATION INSTRUCTIONS:

1. Unplug the vender.
2. Remove the coin insert retainer. See figure 1.
3. Unplug the wires connected to the correct change lamp.
4. Remove the correct change lamp.
5. Tape the wire ends of the wires removed in step 3.
6. Secure the wires so they will not get damaged.
7. Place the filler plate in position. See figure 1.
8. Place the back-up plate in position so the two (2) studs from the filler plate go through the holes in the back-up plate. See figure 1.
9. Secure with two (2) keps nuts #8 - 32.
10. Place the coin insert retainer in position.
11. Secure with keps nuts #8 - 32.

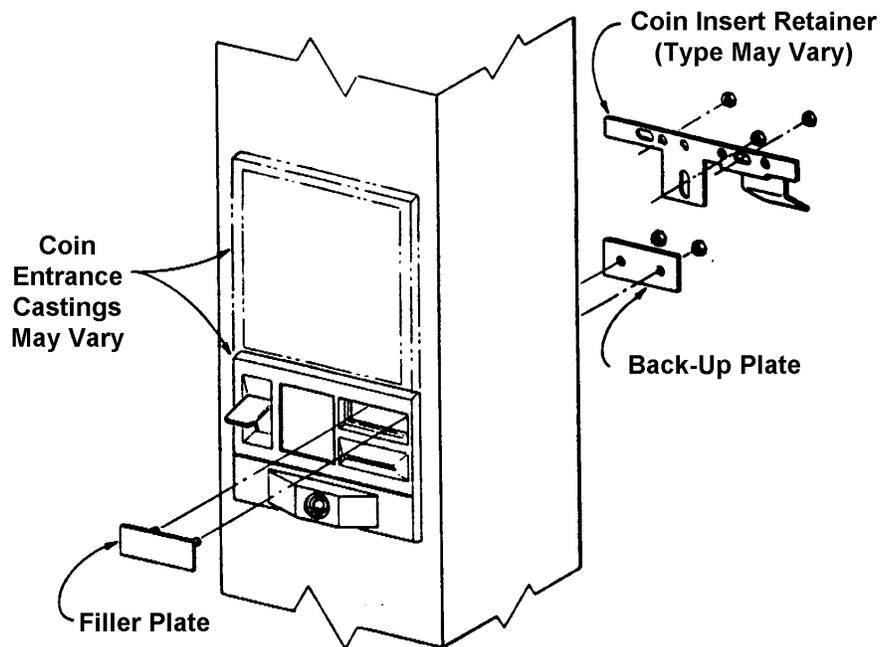


FIGURE 1