

Technical Bulletin

Bulletin Number: 479 Revision Number: R-03

Release Date: October 29, 1993 Revision Date: November 6, 1997

SUBJECT: COIN CUP DOOR / ALTERNATE COIN CUP

MODELS AFFECTED: All DNCB Venders

SERIAL NUMBER BREAK: All DNCB venders serialized 0001-2392CE and higher.


REASON: To provide a door for the coin cup to deter different types of vandalism.

BULLETIN INDEX

- 1) Venders serialized 0001-2392CE to 0001-6439CV with a plastic coin cup.
Coin cup door and mounting bracket.....Page 2
- 2) Venders serialized 0001-2392CE and higher with a metal coin cup.
Coin cup door and mounting bracket.....Page 3
- 3) Venders serialized 0001-2392CE and higher with a plastic coin cup.
Alternate metal coin cup and coin cup mounting plate assembly.....Page 4
- 4) Venders serialized 0001-6439CU and higher with plastic coin cup
Alternate metal coin cup and coin cup mounting plate assembly.....Page 4



**COIN CUP DOOR AND MOUNTING BRACKET
VENDERS WITH PLASTIC COIN CUP
SERIALIZED 0001-2392CE TO 0001-6439CVV**

Order: 1 - 360,050,770.03 Plastic Coin Cup Door
1 - 360,050,760.03 Plastic Coin Cup Door Mounting Bracket

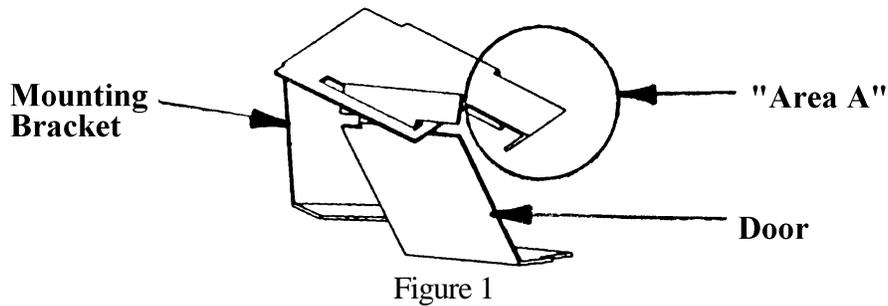

To Install:

1. **Note:** *Door and mounting bracket may be installed with the coin cup in the vender or out of the vender.*
2. Install coin cup door to mounting bracket. (See figure 1.)
3. Once assembled, hold the door in the open position (as shown in figure 2), place the assembly in position so that "Area A" in figure 1 overlaps the top lip of the change cup. (See "Area B" in figure 2.)

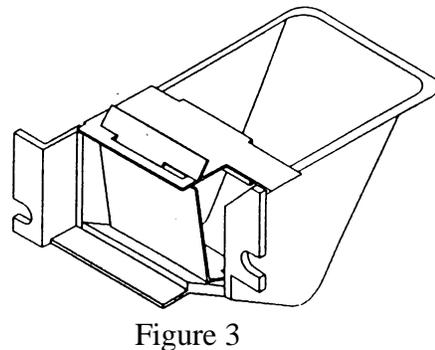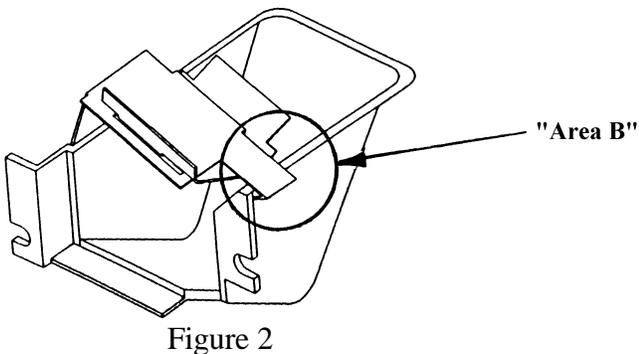

4. Snap the assembly in position as shown in figure 3.

**COIN CUP DOOR AND MOUNTING BRACKET
VENDERS WITH METAL COIN CUP
SERIALIZED 0001-2392CE AND HIGHER**

Order: 1 - 360,050,750.03 Metal Coin Cup Door
1 - 360,052,400.13 Metal Coin Cup Door Mounting Bracket Assembly

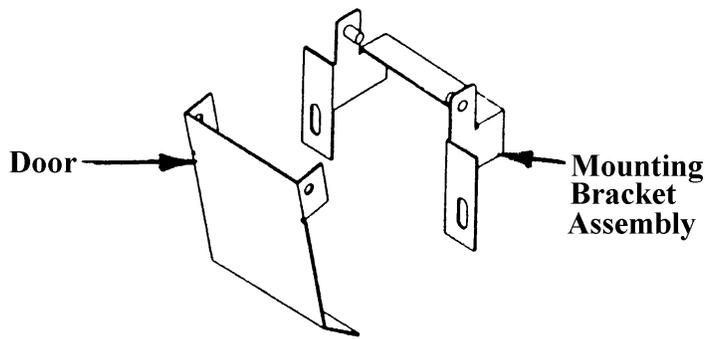


Figure 1




Figure 2

To Install:

1. **Note:** *Door and mounting bracket assembly must be installed with the coin cup in the vender.*
2. Remove keps nuts securing coin cup and coin cup cover.
3. Remove the coin cup and coin cup cover. (See figure 3.)

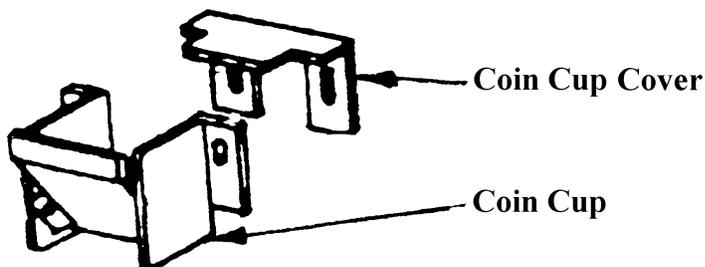


Figure 3




Figure 4


4. Discard coin cup cover.
5. Place coin cup back in position in vender.
6. Install coin cup door to mounting bracket. (See figure 2.)
7. Once assembled, place the assembly in position as shown in figure 4.
8. Secure coin cup, coin cup door and coin cup door mounting bracket assembly with keps nuts removed in step 2.

METAL COIN CUP AND COIN CUP MOUNTING PLATE ASSEMBLY
VENDERS WITH PLASTIC COIN CUP
SERIALIZED 0001-2392CE AND HIGHER/
VENDERS SERIALIZED 0001-6439CV AND HIGHER


Order: 1 - 432,017,200.03 Metal Coin Cup Assy.
1 - 432,017,300.03 Assy., Coin Cup Mounting Plate

To Install:

1. Remove existing plastic coin cup, opener housing reinforcement plate, changer cup, and opener bezel.
2. Install coin cup mounting plate assembly and secure with three keps nuts. *Note: Do not install keps nut in "Area A" at this time.*
3. Install coin cup assembly and secure with two keps nuts.

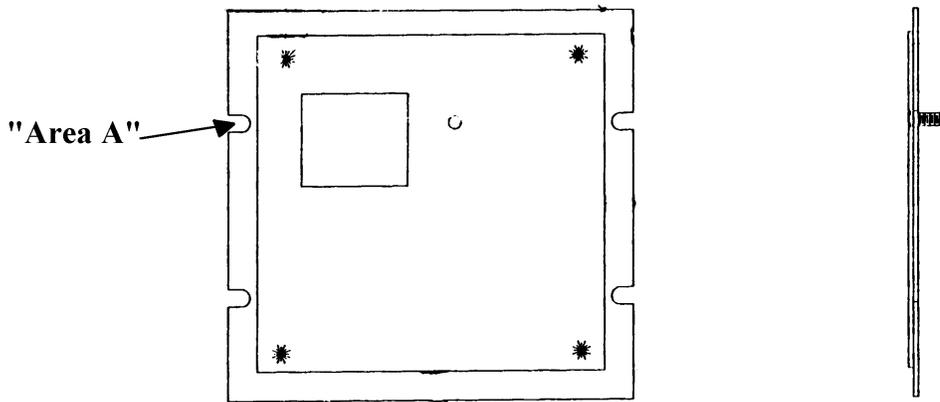

432,017,300.03
Coin Cup Mounting Plate Assembly



432,017,200.03
Coin Cup Assembly